


DURACELL®

Alkaline-Manganese Dioxide Battery

N

Size: MN 9100 (LR1)


Zn/MnO₂

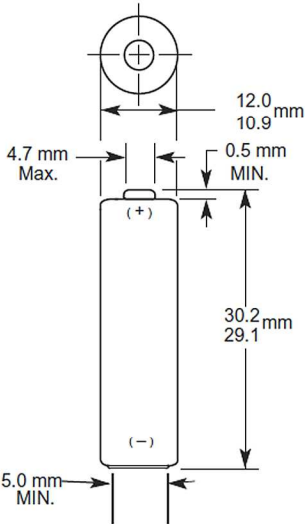

Nominal Voltage:	1.5 V
Nominal Internal Impedance:	420 m-ohm @ 1kHz
Average Weight:	9.0 gm (0.3 oz.)
Volume:	3.4 cm ³ (0.21 in. ³)
Terminals:	Flat
Operating Temperature Range:	-20°C to 54°C (-4°F to 130°F)
NEDA/ANSI:	910A
IEC:	LR1

Dimensions shown are IEC/ANSI standards

Typical Discharge Characteristics at 21°C (70°F)

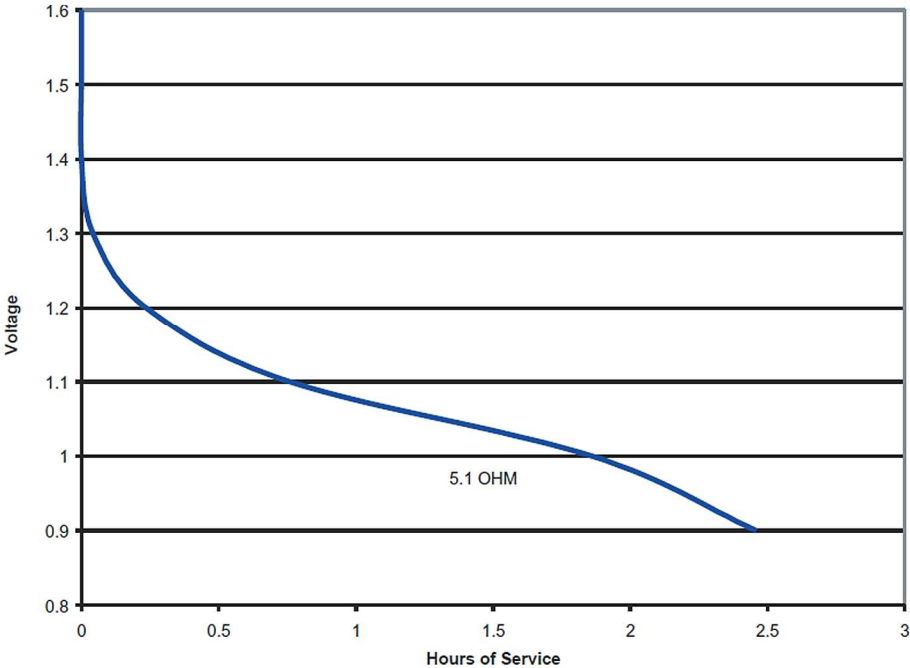

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.

DURACELL®


Alkaline-Manganese Dioxide Battery

N


Size: MN 9100 (LR1)

Zn/MnO₂


Typical Discharge Characteristics

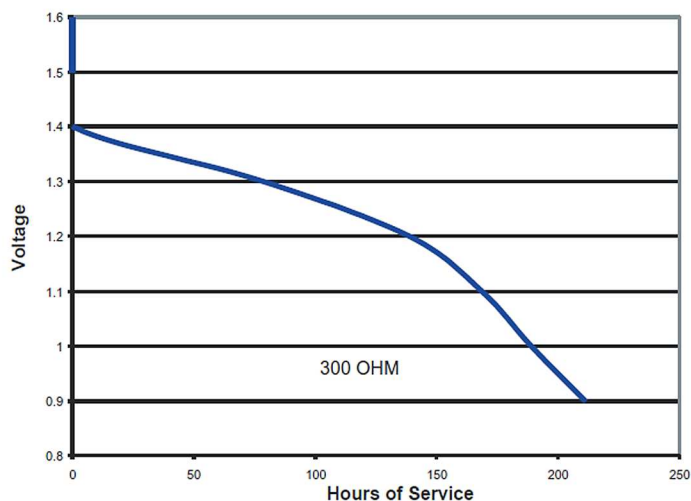


Typical Discharge Characteristics

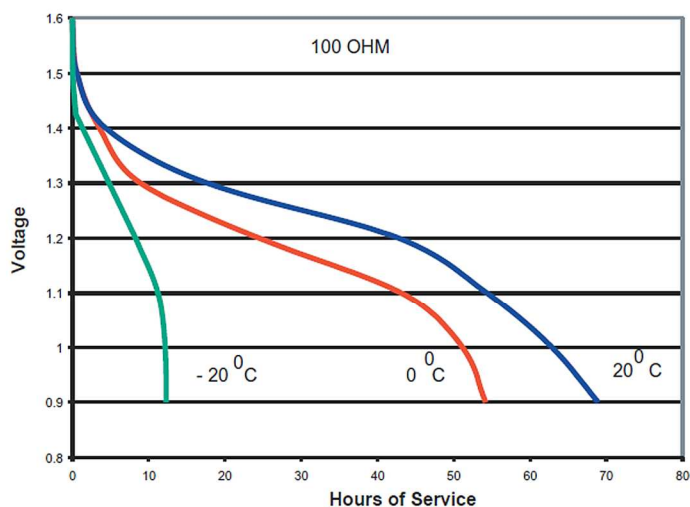

Typical Discharge Characteristics

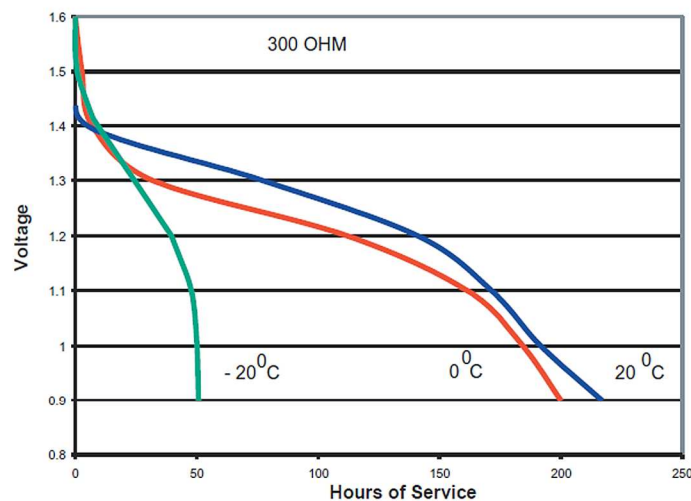

Typical Discharge Characteristics

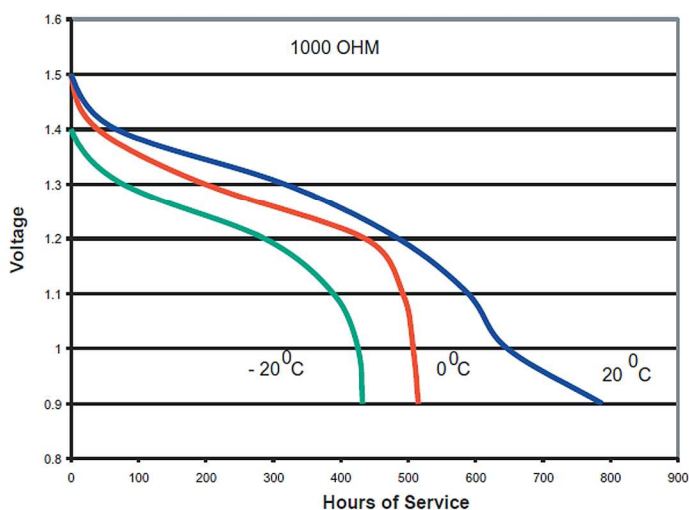

DURACELL®
BATTERIES

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.